



Crestile
Collection



Double Digital
Tiles Affordable



Can be used on the floor, Wall,
Kitchen, Bathroom, etc



Easier to load and transport



Cleaning and
maintenance are easy




Installation is simple
and quick

VS

Marble



Marble is inherently
expensive



Commonly Use
For Flooring



Transport and installation
process lengthy



Requires extensive
cleaning and maintenance



Installation Requires
professional



Application Area

The Archstone Collection surfaces are architectural gems that can be used across a spectrum of environments. You can use these Tiles (Decor) as the backspace, Highlighted, Bathroom, furniture, Exterior, flooring, wall cladding, and much more - imagination is the key.




Residential
Spaces




Commercial
Spaces




Malls &
Restaurants



Outdoor




External
Wall Covering




Public
Spaces



Schools




Bathrooms




Kitchens



Hospitals



Sport Spaces



Airports


Product Advantages



Water Resistance



Digital vitrified tiles are waterproof, no liquid can damaged the surface.



Extremely Durable



Digital vitrified tiles high strength useful to any heavy traffic areas



Scratch Resistant



Digital vitrified tiles do not splinter, break or get damaged



Hygienic Surface



Digital vitrified tiles antibacterial antiviral surface



StainResistant



Digital vitrified tiles are completely non-porous and therefore are not damaged by stain or humidity



Easy to Clean



Digital vitrified tiles can be cleaned with a simple passage of water or detergent.



Fire Resistant



Digital vitrified tiles are not flammable, reduce the spread of flames, do not burn, and do not emit toxic fume



Luxurious Look



Digital vitrified tiles have a luxurious and elegant look on wall and floor.


DRY COPENHAGEN



Series
Crestile

Body
White

Size
600 x 1200 mm

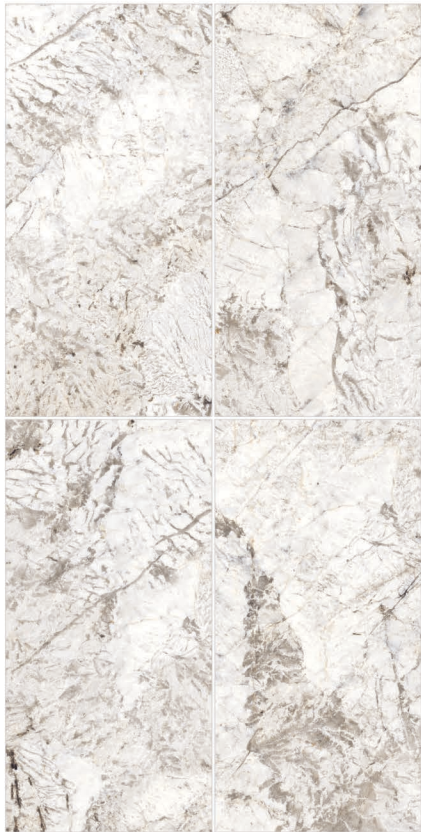

DRY COPENHAGEN



Series
Crestile

Body
White

Size
600 x 1200 mm

OCEANIC BEIGE



Series
Crestile

Body
Beige

Size
600 x 1200 mm



OCEANIC TEAL



Series
Crestile

Body
Beige

Size
600 x 1200 mm




BIJOUX DE REX



Series
Crestile

Body
Choco

Size
600 x 1200 mm

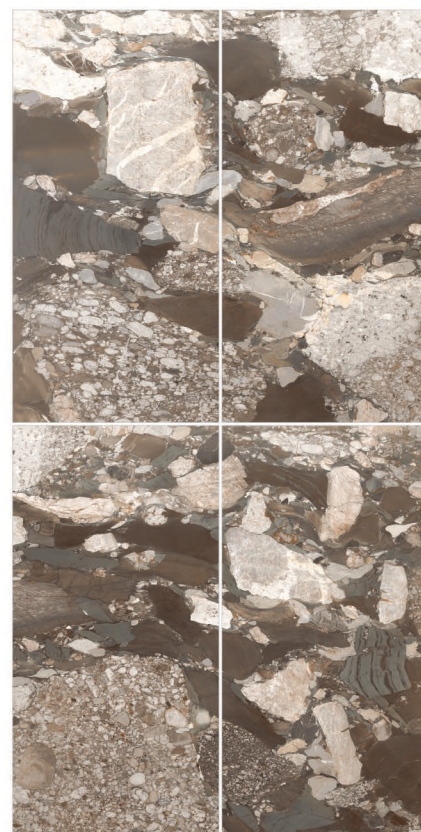

BIJOUX DE REX



Series
Crestile

Body
Choco

Size
600 x 1200 mm

Technical Specification

QUALITY ITEMS	TECHNICAL FEATURE	STANDARD METHOD ISO	UNIT	REQUIREMENTS ISO 13006:2018(E) E _v ≤0.5% GROUP BIa	Values			
DIMENSIONS AND SURFACE QUALITY	Width	ISO 10545 - 2	mm	± 0.3%	± 01%	± 0.8 mm	± 01%	± 1 mm
	Length	ISO 10545 - 2	mm	± 0.3%	± 01%	± 0.8 mm	± 01%	± 1.2 mm
	Thickness	ISO 10545 - 2	mm	± 5.0%	± 4%	± 0.5 mm	± 4%	± 0.5 mm
	Straightness of Side	ISO 10545 - 2	mm	± 0.3%	± 01%	± 0.8 mm	± 01%	± 1 mm
	Rectangularity	ISO 10545 - 2	mm	± 0.3%	± 01%	± 1.3 mm	± 01%	± 1.5 mm
	Surface Flatness	ISO 10545 - 2	mm	± 0.4%	± 01%	± 1.8 mm	± 0.2%	± 3 mm
	Surface Quality	ISO 10545 - 2	-	A minimum of 95% of the tiles are to be free from visible defects which can impair the appearance of a major area of tiles		95%		
PHYSICAL PROPERTIES	Water Absorption	ISO 10545 - 3	%	≤ 0.5%, Individual 0.6%		Avg. ≤ 0.08%, Individual 0.2%		
	Modulus of Rupture	ISO 10545 - 4	N/mm²	Min. 35, Individual Min. 32		Min. 42		
	Breaking Strength	ISO 10545 - 4	N	Not less than 1300		Min. 1800		
	Moisture Expansion	ISO 10545 - 10	mm/m	-		0,02		
	Mohs Hardness of surface	NA	-	-		7		
	Coefficient of linear thermal expansion from ambient temperature to 100 °C	ISO 10545 - 8	K ⁻¹	As declared by the Manufacturer		6x10 ⁻⁶ K ⁻¹ max		
	Thermal Shock Resistance	ISO 10545 - 9	-	As declared by the Manufacturer		No damage		
	Crazing Resistance: glazed tiles	ISO 10545 - 11	-	Required		No damage for Min. 10 Cycles		
	Bulk Density	ISO 10545 - 3	g/cc	2,2		2,2		
	Impact Resistance	ISO 10545 - 5	-	As declared by the Manufacturer		0,55		
	Frost Resistance	ISO 10545 - 12	-	As declared by the Manufacturer		No change		
	Small color differences	ISO 10545 - 16	-	Plain colored tiles only where required GL: ΔE < 0.75 UGL: ΔE < 1.0		No change		
CHEMICAL PROPERTIES	Resistance to staining	ISO 10545 - 14	Class	Minimum Class 3		Class 4		
	Resistance to household chemicals and swimming pool salts	ISO 10545 - 13	Class	Minimum B		Compliant		
	Resistance to acids & alkalis	ISO 10545 - 13	Class	As declared by the Manufacturer		Compliant		

Application Area



Product Advantages

