



Luxxo
Collection



Double Digital
Tiles Affordable



Can be used on the floor, Wall,
Kitchen, Bathroom, etc



Easier to load and transport



Cleaning and
maintenance are easy




Installation is simple
and quick

VS

Marble



Marble is inherently
expensive



Commonly Use
For Flooring



Transport and installation
process lengthy



Requires extensive
cleaning and maintenance




Installation Requires
professional




VS

**Normal
Digital Tiles**

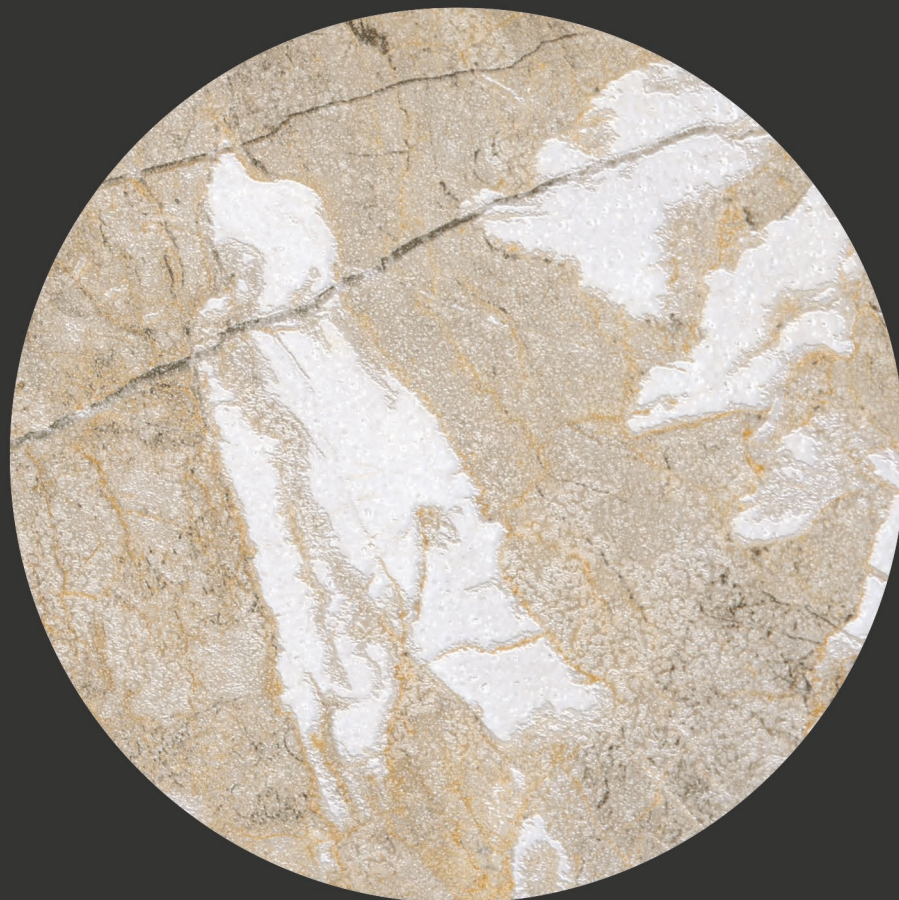

Surface are variable up-deep both
comes together Feel like Natural Marble
Random Relief Surface
With Random Design

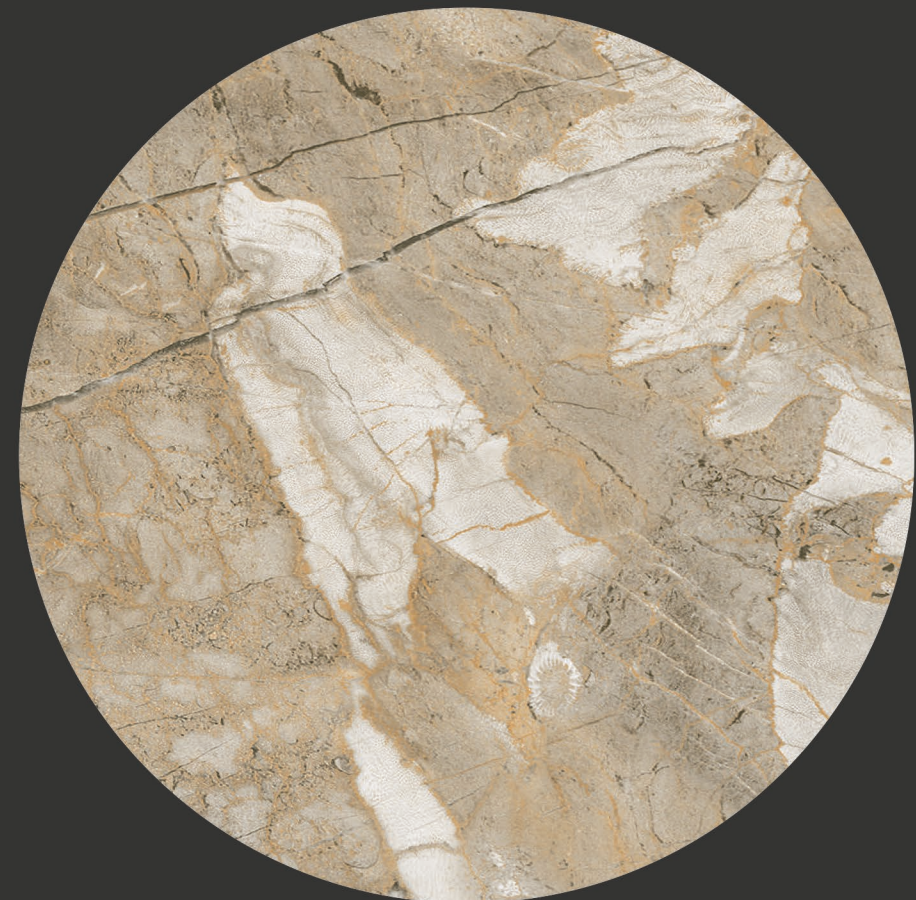



Normal Surface Gloss Or Matt
Single Relief Surface

feel The Wave Surface.

 **Double
Digital**
600 x 1200 mm

Inspire By Nature Architect Base Tile Effect," inspired by nature's textures, can be used on many things in different industries. You can have wall art with raised patterns inspired by nature or throw pillows with designs that look like the natural world. Every raised detail shows the exciting mix of tension, smoothness, gentleness, and complexity in nature.

Make indoor spaces more special with eye-catching wall art that brings nature inside. Patterns inspired by nature create a nice atmosphere, turning walls into beautiful works of art

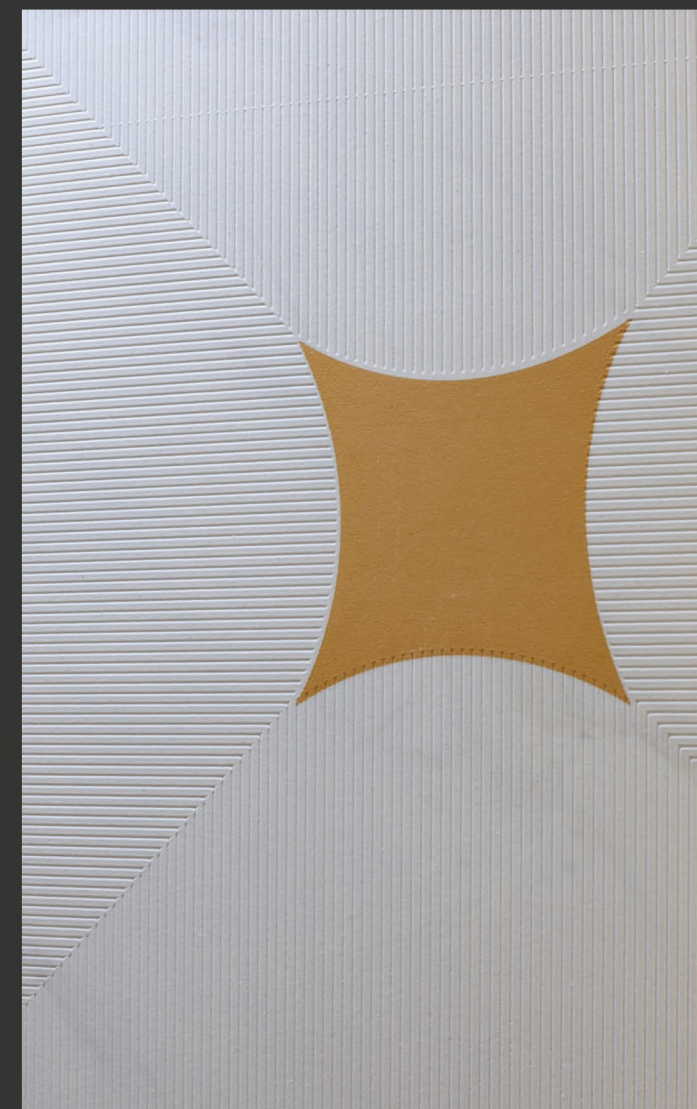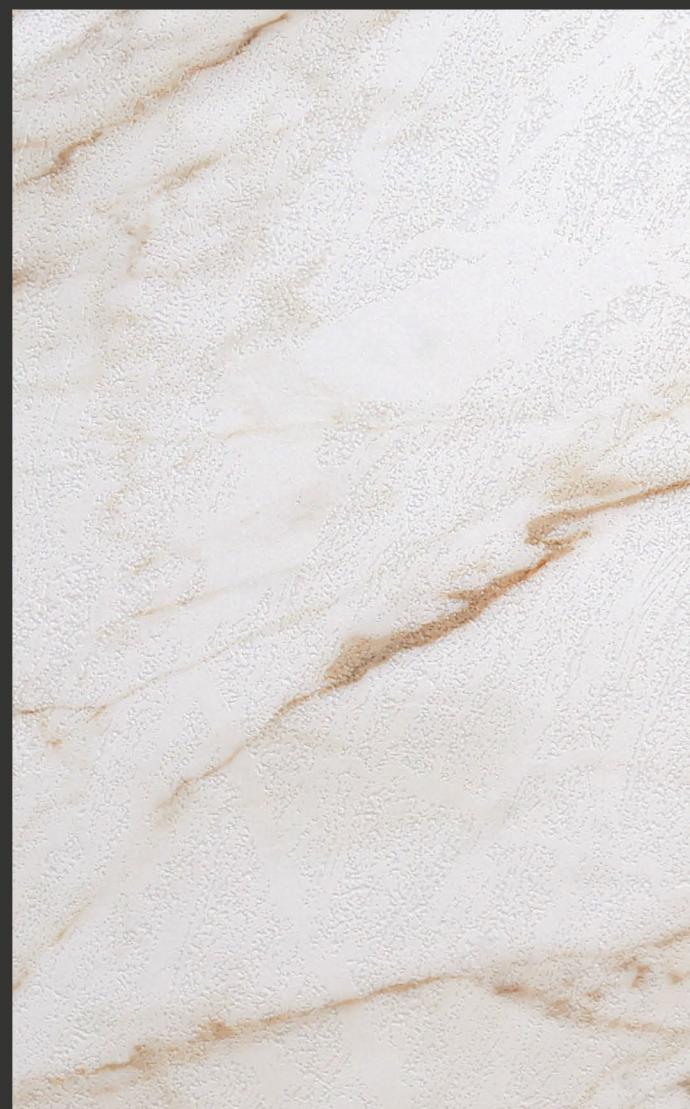



Application Area

The Archstone Collection surfaces are architectural gems that can be used across a spectrum of environments. You can use these Tiles (Decor) as the backspace, Highlighted, Bathroom, furniture, Exterior, flooring, wall cladding, and much more - imagination is the key.




Residential
Spaces




Commercial
Spaces




Malls &
Restaurants



Outdoor




External
Wall Covering




Public
Spaces



Schools




Bathrooms




Kitchens



Hospitals



Sport Spaces



Airports


Product Advantages



Water Resistance



Digital vitrified tiles are waterproof, no liquid can damaged the surface.



Extremely Durable



Digital vitrified tiles high strength useful to any heavy traffic areas



Scratch Resistant



Digital vitrified tiles do not splinter, break or get damaged



Hygienic Surface



Digital vitrified tiles antibacterial antiviral surface



StainResistant



Digital vitrified tiles are completely non-porous and therefore are not damaged by stain or humidity



Easy to Clean



Digital vitrified tiles can be cleaned with a simple passage of water or detergent.



Fire Resistant



Digital vitrified tiles are not flammable, reduce the spread of flames, do not burn, and do not emit toxic fume



Luxurious Look



Digital vitrified tiles luxuries and elegance look on wall and floor.


CEMENTO WHITE



Series
Luxxo

Body
White

Size
600 x 1200 mm

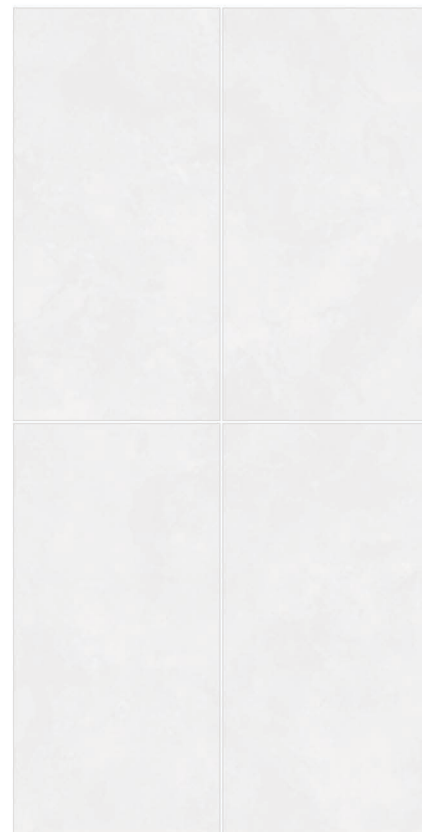

CEMENTO WHITE



Series
Luxxo

Body
White

Size
600 x 1200 mm


CEMENTO IVORY



Series
Luxxo

Body
Beige

Size
600 x 1200 mm

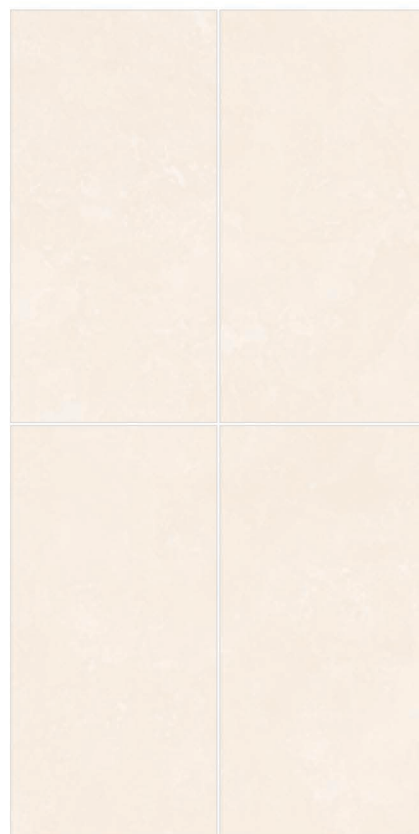

CEMENTO IVORY



Series
Luxxo

Body
Beige

Size
600 x 1200 mm

CEMENTO BROWN



Series
Luxxo

Body
Choco

Size
600 x 1200 mm



CEMENTO BROWN




Series
Luxxo

Body
Choco

Size
600 x 1200 mm

CEMENTO GREY

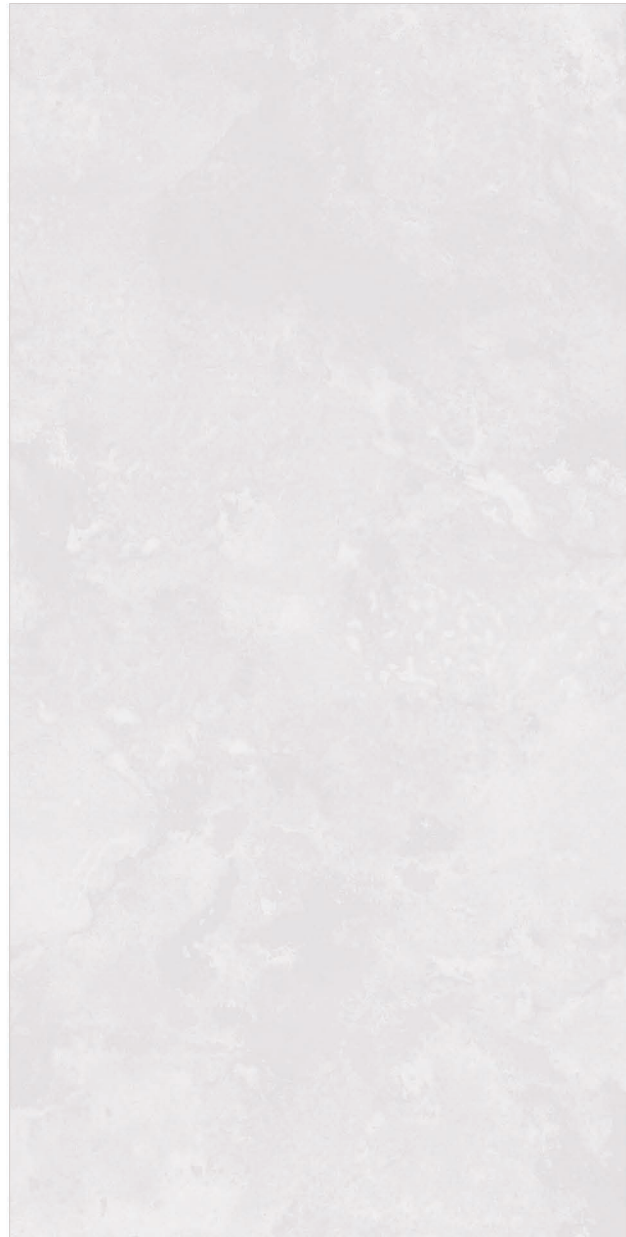

Series
Luxxo

Body
Grey

Size
600 x 1200 mm



CEMENTO GREY




Series
Luxxo

Body
Grey

Size
600 x 1200 mm


CEMENTO BLACK

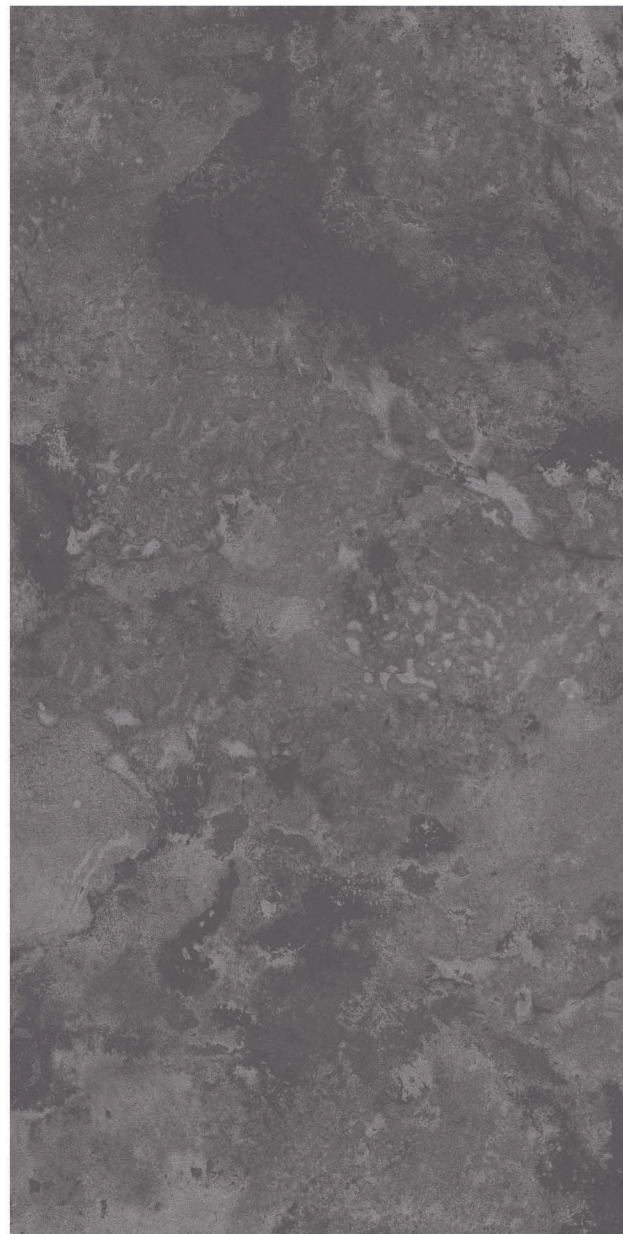

Series
Luxxo

Body
Black

Size
600 x 1200 mm

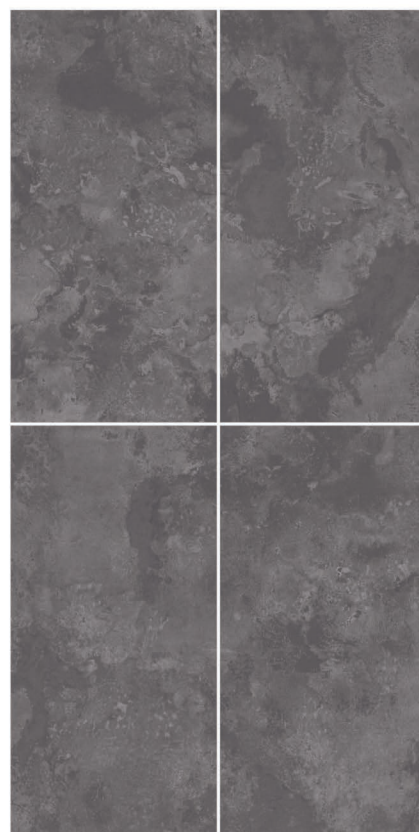

CEMENTO BLACK




Series
Luxxo

Body
Black

Size
600 x 1200 mm

CONKRET WHITE

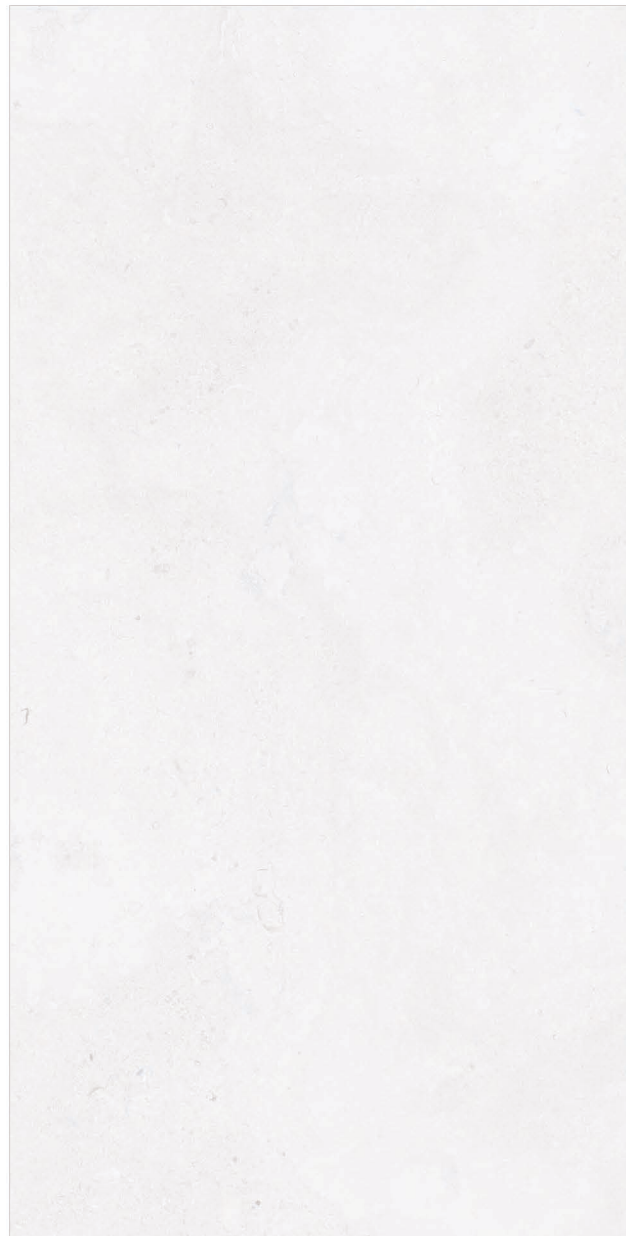

Series
Luxxo

Body
White

Size
600 x 1200 mm



CONKRET IVORY



Series
Luxxo

Body
Beige

Size
600 x 1200 mm



CONKRET IVORY



Series
Luxxo

Body
Beige

Size
600 x 1200 mm

CONKRET BROWN



Series
Luxxo

Body
Choco

Size
600 x 1200 mm



CONKRET BROWN



Series
Luxxo

Body
Choco

Size
600 x 1200 mm

CONKRET GREY



Series
Luxxo

Body
Grey

Size
600 x 1200 mm



CONKRET GREY



Series
Luxxo

Body
Grey

Size
600 x 1200 mm

CONKRET BLACK



Series
Luxxo

Body
Black

Size
600 x 1200 mm




MARRIOT WHITE



Series
Luxxo

Body
White

Size
600 x 1200 mm

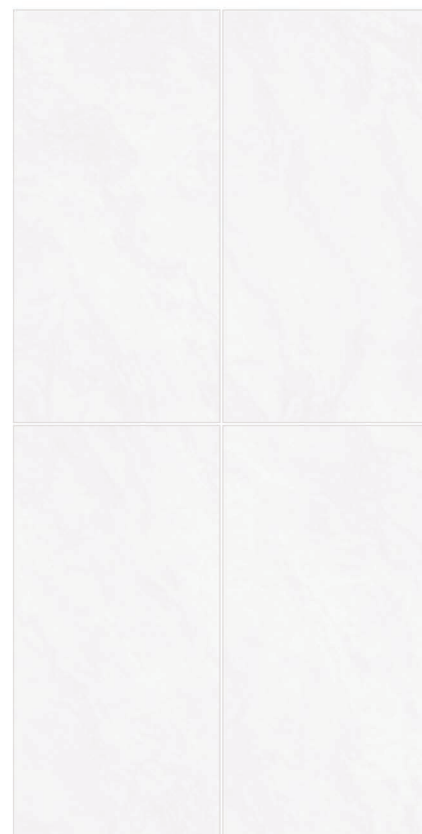

MARRIOT WHITE




Series
Luxxo

Body
White

Size
600 x 1200 mm


MARRIOT IVORY

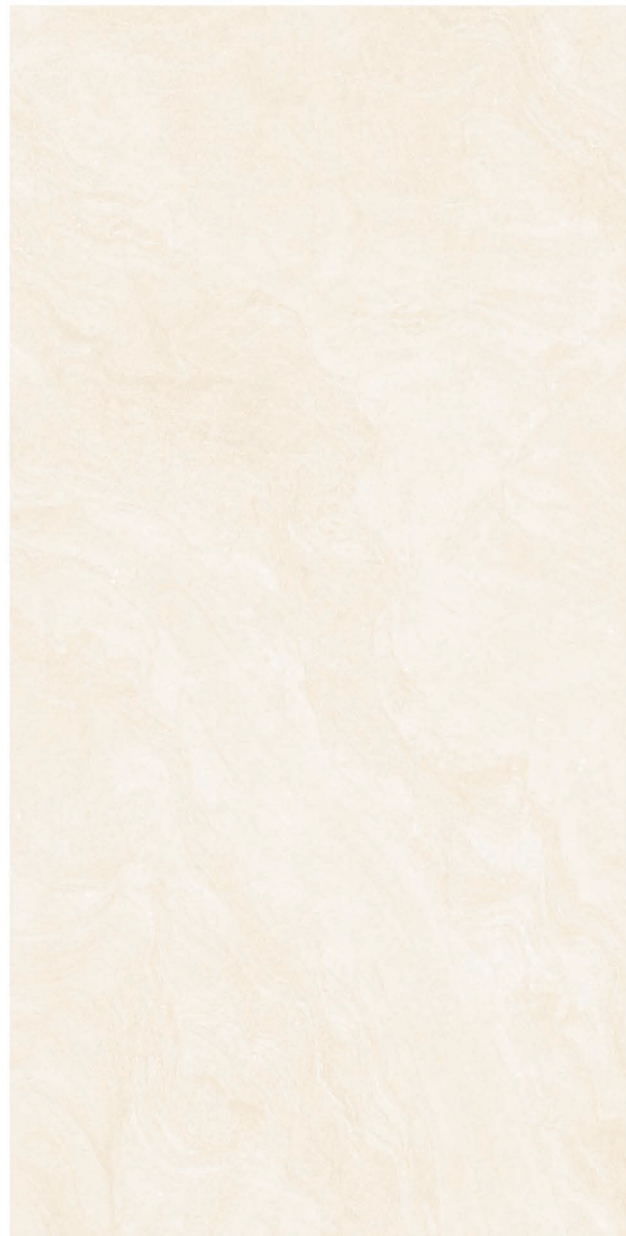

Series
Luxxo

Body
Beige

Size
600 x 1200 mm

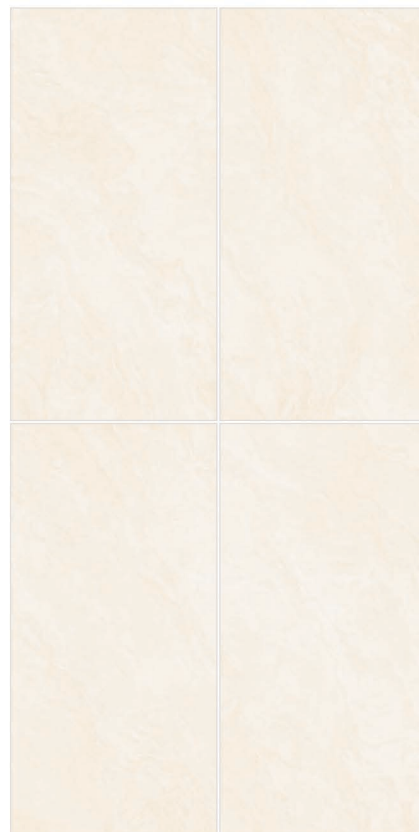

MARRIOT IVORY



Series
Luxxo

Body
Beige

Size
600 x 1200 mm

MARRIOT BROWN



Series
Luxxo

Body
Choco

Size
600 x 1200 mm



MARRIOT BROWN



Series
Luxxo

Body
Choco

Size
600 x 1200 mm

MARRIOT GREY



Series
Luxxo

Body
Grey

Size
600 x 1200 mm



MARRIOT GREY



Series
Luxxo

Body
Grey

Size
600 x 1200 mm

MARRIOT BLACK



Series
Luxxo

Body
Black

Size
600 x 1200 mm




TIANTA WHITE



Series
Luxxo

Body
White

Size
600 x 1200 mm

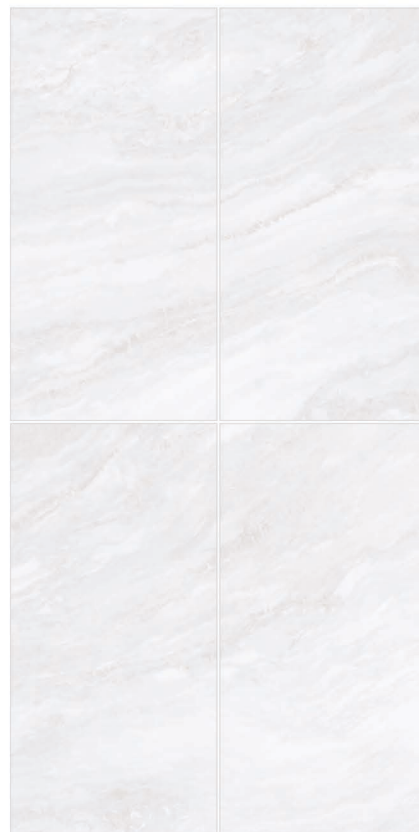


TIANTA IVORY



Series
Luxxo

Body
Beige

Size
600 x 1200 mm

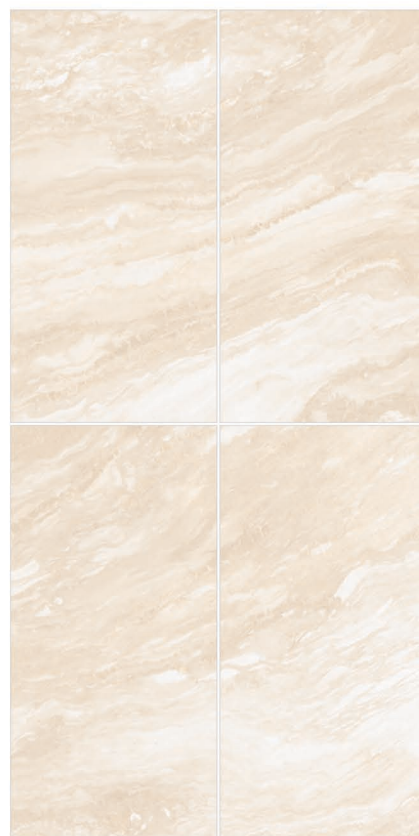

TIANTA IVORY




Series
Luxxo

Body
Beige

Size
600 x 1200 mm


TIANTA BROWN

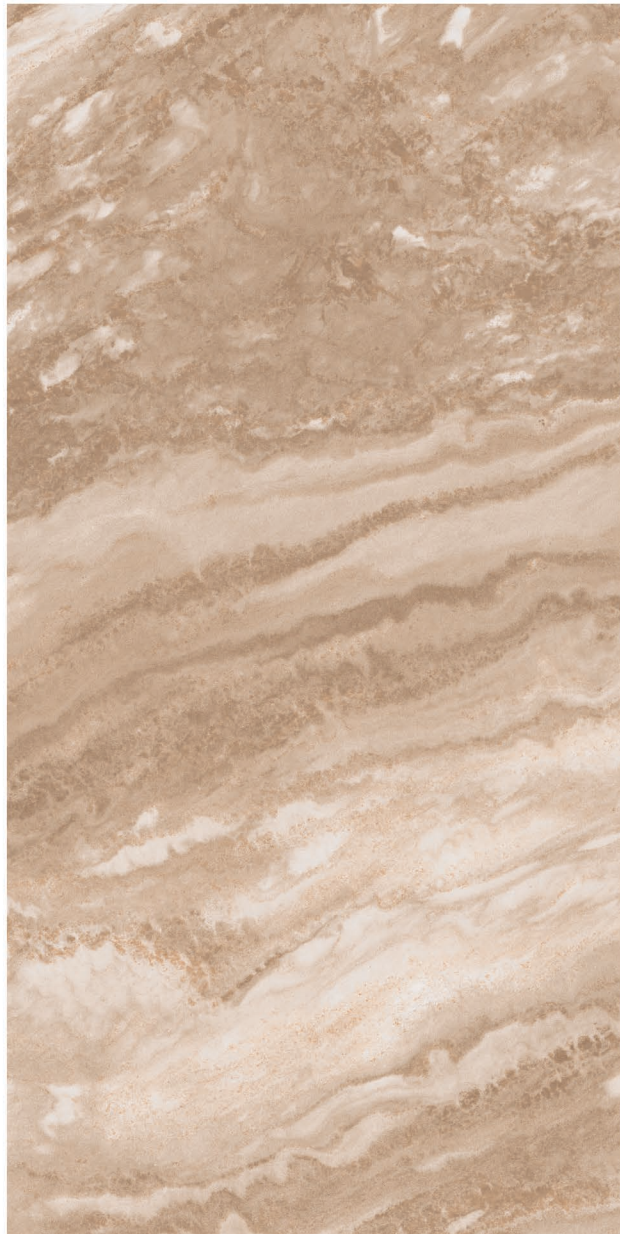

Series
Luxxo

Body
Choco

Size
600 x 1200 mm

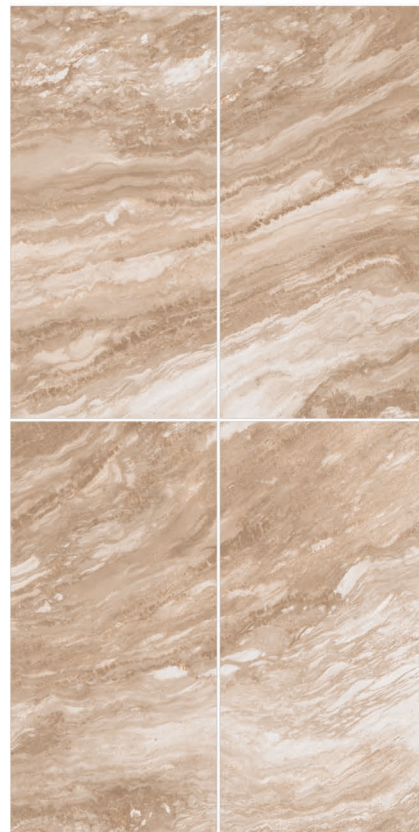

TIANTA BROWN




Series
Luxxo

Body
Choco

Size
600 x 1200 mm


TIANTA GREY

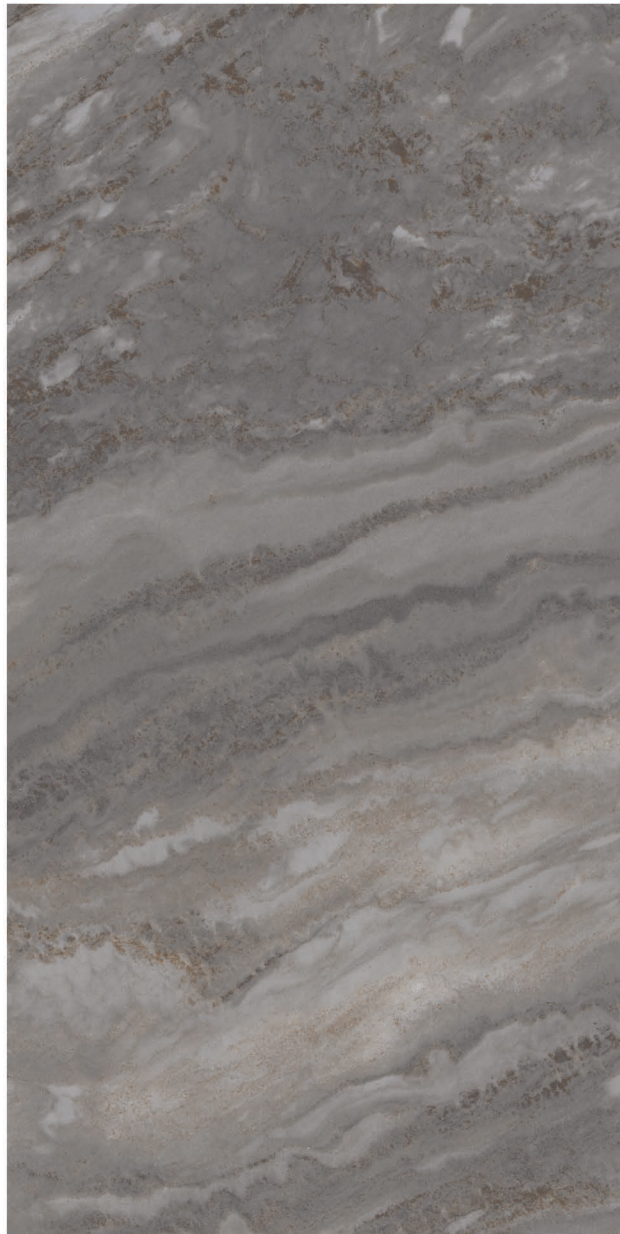

Series
Luxxo

Body
Grey

Size
600 x 1200 mm

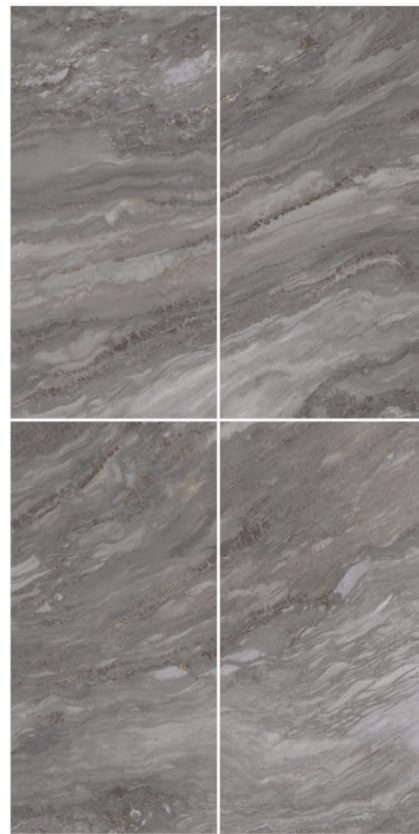

TIANTA GREY




Series
Luxxo

Body
Grey

Size
600 x 1200 mm


TIANTA BLACK

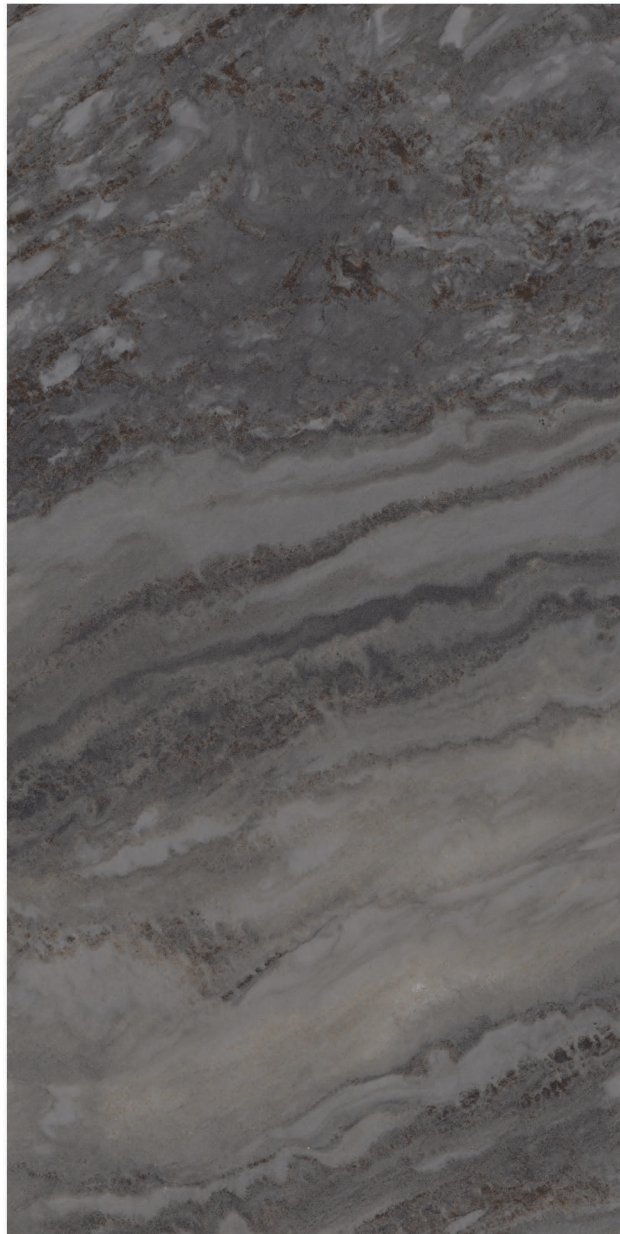

Series
Luxxo

Body
Black

Size
600 x 1200 mm

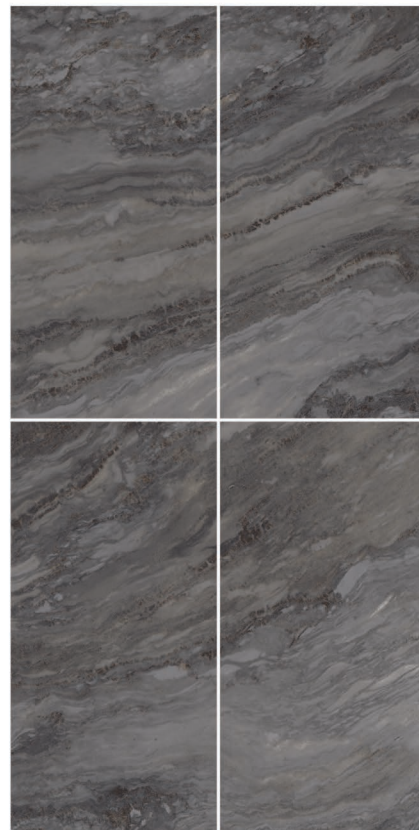

Technical Specification

QUALITY ITEMS	TECHNICAL FEATURE	STANDARD METHOD ISO	UNIT	REQUIREMENTS ISO 13006:2018(E) E _v ≤0.5% GROUP BIa	Values			
DIMENSIONS AND SURFACE QUALITY	Width	ISO 10545 - 2	mm	± 0.3%	± 01%	± 0.8 mm	± 01%	± 1 mm
	Length	ISO 10545 - 2	mm	± 0.3%	± 01%	± 0.8 mm	± 01%	± 1.2 mm
	Thickness	ISO 10545 - 2	mm	± 5.0%	± 4%	± 0.5 mm	± 4%	± 0.5 mm
	Straightness of Side	ISO 10545 - 2	mm	± 0.3%	± 01%	± 0.8 mm	± 01%	± 1 mm
	Rectangularity	ISO 10545 - 2	mm	± 0.3%	± 01%	± 1.3 mm	± 01%	± 1.5 mm
	Surface Flatness	ISO 10545 - 2	mm	± 0.4%	± 01%	± 1.8 mm	± 0.2%	± 3 mm
	Surface Quality	ISO 10545 - 2	-	A minimum of 95% of the tiles are to be free from visible defects which can impair the appearance of a major area of tiles		95%		
PHYSICAL PROPERTIES	Water Absorption	ISO 10545 - 3	%	≤ 0.5%, Individual 0.6%		Avg. ≤ 0.08%, Individual 0.2%		
	Modulus of Rupture	ISO 10545 - 4	N/mm²	Min. 35, Individual Min. 32		Min. 42		
	Breaking Strength	ISO 10545 - 4	N	Not less than 1300		Min. 1800		
	Moisture Expansion	ISO 10545 - 10	mm/m	-		0,02		
	Mohs Hardness of surface	NA	-	-		7		
	Coefficient of linear thermal expansion from ambient temperature to 100 °C	ISO 10545 - 8	K ⁻¹	As declared by the Manufacturer		6x10 ⁻⁶ K ⁻¹ max		
	Thermal Shock Resistance	ISO 10545 - 9	-	As declared by the Manufacturer		No damage		
	Crazing Resistance: glazed tiles	ISO 10545 - 11	-	Required		No damage for Min. 10 Cycles		
	Bulk Density	ISO 10545 - 3	g/cc	2,2		2,2		
	Impact Resistance	ISO 10545 - 5	-	As declared by the Manufacturer		0,55		
	Frost Resistance	ISO 10545 - 12	-	As declared by the Manufacturer		No change		
	Small color differences	ISO 10545 - 16	-	Plain colored tiles only where required GL: ΔE < 0.75 UGL: ΔE < 1.0		No change		
CHEMICAL PROPERTIES	Resistance to staining	ISO 10545 - 14	Class	Minimum Class 3		Class 4		
	Resistance to household chemicals and swimming pool salts	ISO 10545 - 13	Class	Minimum B		Compliant		
	Resistance to acids & alkalis	ISO 10545 - 13	Class	As declared by the Manufacturer		Compliant		

Application Area


Residential Spaces


Commercial Spaces


Malls & Restaurants


Public Spaces


Sport Spaces


Schools


Hospitals


Outdoor



External Wall Covering



Bathrooms



Kitchens



Airports


Product Advantages



Water Proof



Easy to Install



Stain Resistant



Chemical Resistant



Scratch Resistant


Crazing Resistant



Frost Resistant


Extremely Durable


Easy to Clean


Luxurious Look


Fire Resistant


Hygienic Surface